


LED PÁS CV ERALED - SÉRIA DIGITAL


Dynamický LED pás konštantného napätia SMD2835



PHOTOMETRICS

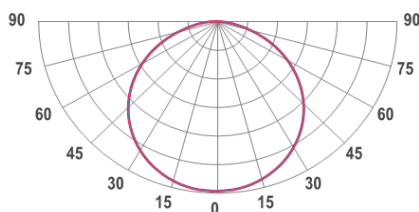

ILUMINAČNÝ DIAGRAM

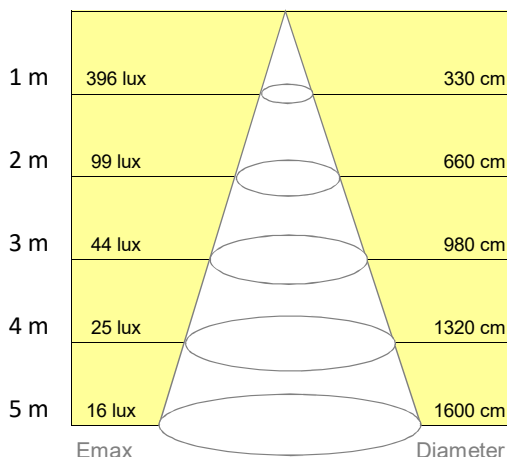

Model

ERA2835-WN120-WW-24

ERA2835-WN120-NW-24

ERA2835-WN120-CW-24

3000K

4000K

6000K

ELEKTRO PARAMETER

24VDC

10,4W/m

FARBA CCT

3000K neutral biela CRI85/95

4000K teplá biela CRI85/95

6000K studená biela CRI85/95

LED INFO

SMD2835 Epistar

120LED/m

SVETELNÝ TOK

3000K

822lm/m

4000K

868lm/m

6000K

856lm/m

TEPLOTA

Pracovná - 20° ~ + 45°C

Max 60°C

OVLÁDANIE

SPI IC-SM16703P

8pixel/m

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

Voliteľné IP65/IP66/IP67

ROZMERY

Šírka

10 mm

Hrúbka

2 mm

Delenie

125 mm

Balenie

20 m

OVLÁDAČ ERA-RUN-86

