

LED PÁS CC ERALED - SÉRIA PROFI

LED pás konštantného prúdu SMD5630



Model

ERA5630-WN70-WW-HL

ERA5630-WN70-NW-HL

ERA5630-WN70-CW-HL

3000K

4000K

6000K



ELEKTRO PARAMETER

24VDC

21W/m

FARBA CCT

3000K teplá biela CRI90

4000K neutral biela CRI90

6000K studená biela CRI90

LED INFO

SMD5630 Epistar

70LED/m

SVETELNÝ TOK

3000K 3060lm

4000K 3145lm

6000K 3280lm

TEPLOTA


Pracovná - 20° ~ + 60°C

Max < 75°C


STMIEVANIE

PWM, RF, 0-10V, DALI, DMX

PHOTOMETRICS

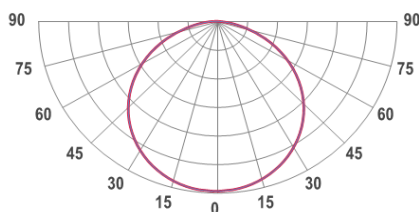

ILUMINAČNÝ DIAGRAM

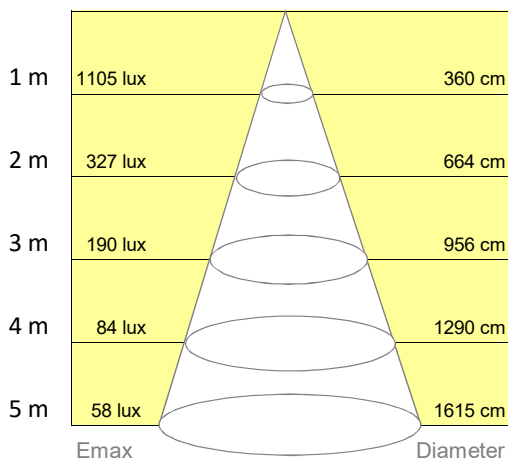

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

Voliteľné IP65/IP67/IP68

ROZMERY

Šírka 10 mm

Hrúbka 1,3 mm

Delenie 100 mm

Balenie 5 m

