

LED PÁS CV ERALED - SÉRIA ŠTANDARD

LED pás konštantného napätia SMD5630



Model

ERA5630-WN60-WW-24V

3000K

ERA5630-WN60-NW-24V


4000K

ERA5630-WN60-CW-24V


6000K



PHOTOMETRICS

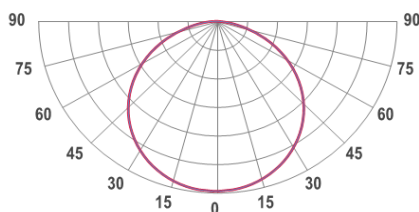

ILUMINAČNÝ DIAGRAM

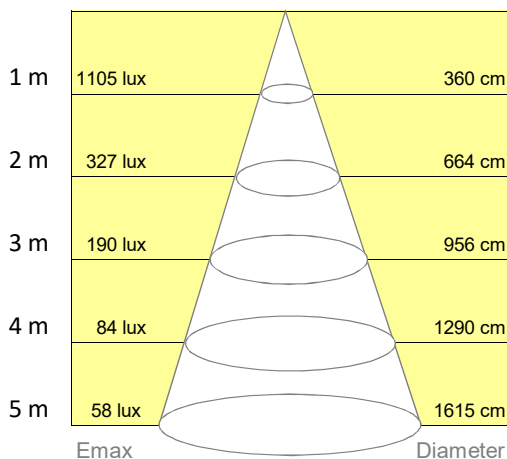

ELEKTRO PARAMETER

24VDC
18W/m

FARBA CCT

3000K teplá biela CRI>85
4000K neutral biela CRI>85
6000K studená biela CRI>85

LED INFO

SMD5630 Epistar
60LED/m

SVETELNÝ TOK

3000K 2780lm
4000K 2840lm
6000K 2970lm

TEPLOTA

Pracovná - 20° ~ + 60°C
Max < 70°C

STMIEVANIE

PWM, RF, 0-10V, DALI, DMX

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20
Voliteľné IP65/IP67/IP68

ROZMERY

Šírka 12 mm
Hrúbka 1,4 mm
Delenie 100 mm
Balenie 5 m

