

# LED PÁS CV ERALED - SÉRIA ŠTANDARD

LED pás konštantného napätia SMD3014



Model

ERA3014-WN120-WW-24V

ERA3014-WN120-NW-24V

ERA3014-WN120-CW-24V

3000K

4000K

6000K



ELEKTRO PARAMETER

24VDC

12W/m

FARBA CCT

3000K teplá biela CRI>85

4000K neutral biela CRI>85

6000K studená biela CRI>85

LED INFO

SMD3014 Epistar

120LED/m

SVETELNÝ TOK

3000K 1584lm

4000K 1696lm

6000K 1762lm

TEPLOTA


Pracovná - 20° ~ + 55°C

Max < 60°C


STMIEVANIE

PWM, RF, 0-10V, DALI, DMX

PHOTOMETRICS

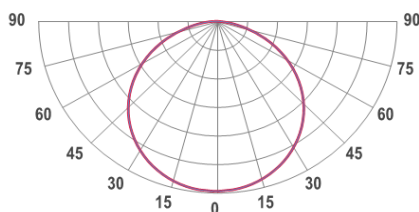

ILUMINAČNÝ DIAGRAM

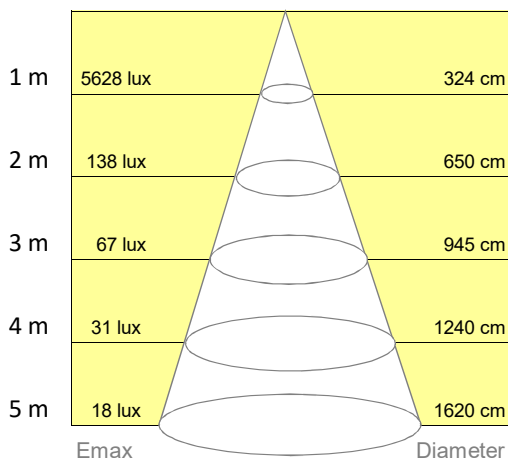

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

Voliteľné IP65/IP67/IP68

ROZMERY

Šírka 10 mm

Hrúbka 1,2 mm

Delenie 50 mm

Balenie 5 m

