

# LED PÁS CV ERALED - SÉRIA ŠTANDARD

LED pás konštantného napätia SMD2216



Model

**ERA2216-WN120-WW**

**ERA2216-WN120-NW**

**ERA2216-WN120-CW**

3000K

4000K

6000K



**ELEKTRO PARAMETER**

24VDC

6W/m

**FARBA CCT**

3000K teplá biela CRI>85

4000K neutral biela CRI>85

6000K studená biela CRI>85

**LED INFO**

SMD2216 Epistar

120LED/m

**SVETELNÝ TOK**

3000K 650lm

4000K 735lm

6000K 786lm

**TEPLOTA**


Pracovná - 20° ~ + 55°C

Max < 60°C


**STMIEVANIE**

PWM, RF, 0-10V, DALI, DMX

PHOTOMETRICS

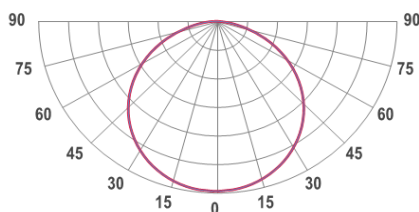

ILUMINAČNÝ DIAGRAM

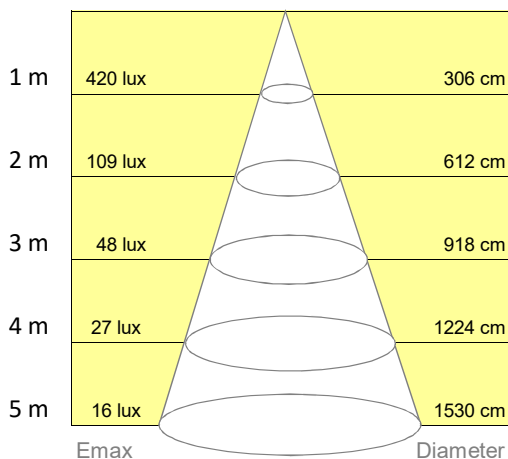

**VYŽAROVACÍ UHOL**

120°

**KRYTIE**

IP20

Voliteľné IP65/IP67/IP68

**ROZMERY**

Šírka 8 mm

Hrúbka 1,2 mm

Delenie 50 mm

Balenie 5 m

