


LED PÁS CV ERALED - SÉRIA ŠTANDARD


LED pás konštantného napätia SMD2835



PHOTOMETRICS

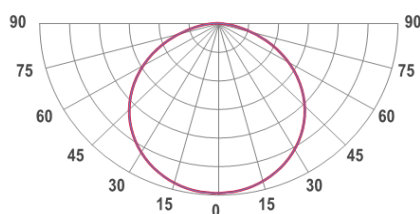

ILUMINAČNÝ DIAGRAM

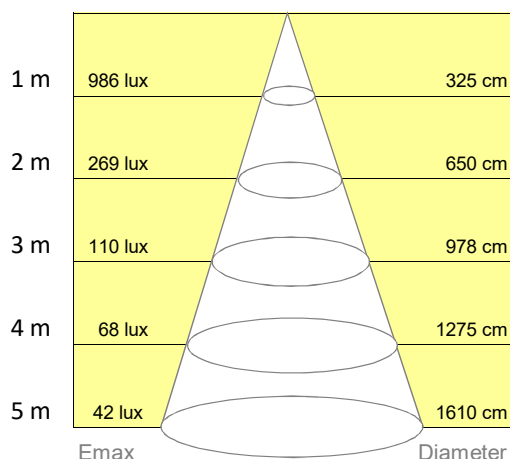

Model

ERA2835-WN120-WW-24V

3000K

ERA2835-WN120-NW-24V

4000K

ERA2835-WN120-CW-24V

6000K

ELEKTRO PARAMETER

24VDC

24W/m

FARBA CCT

3000K teplá biela CRI>85

4000K neutral biela CRI>85

6000K studená biela CRI>85

LED INFO

SMD2835 Epistar

120LED/m

SVETELNÝ TOK

3000K 2760lm

4000K 2820lm

6000K 2940lm

TEPLOTA

Pracovná - 20° ~ + 60°C

Max < 75°C

STMIEVANIE

PWM, RF, 0-10V, DALI, DMX

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

Voliteľné IP65/IP67/IP68

ROZMERY

Šírka 10 mm

Hrúbka 1,2 mm

Delenie 50 mm

Balenie 5 m

