


LED PÁS CC ERALED - séria ULTRA EFEKTÍVNE



LED pás extra výkonný s nízkym príkonom.



PHOTOMETRICS

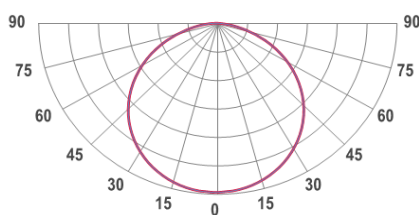

ILUMINAČNÝ DIAGRAM

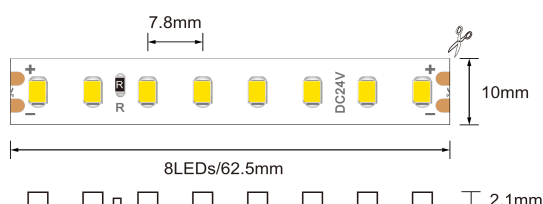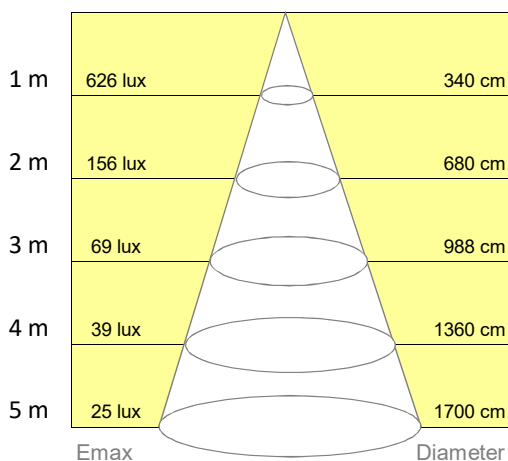

Model

ERA2835-DL128-WW-UE
ERA2835-DL128-NW-UE
ERA2835-DL128-PW-UE

3000K

4000K

6500K

ELEKTRO PARAMETER

24VDC - 9,6W/m
3 SDCM 1 Bin 3oz

FARBA CCT

3000K teplá biela CRI85 vol 90/95
4000K neutral biela CRI85 vol 90/95
6500K studená biela CRI85 vol 90/95

LED INFO

SMD2835 Epistar
128LED/m

SVETELNÝ TOK

3000K 1840lm
4000K 1925lm
6500K 1840lm

TEPLOTA

Pracovná - 20° ~ + 45°C
Max < 75°C

STMIEVANIE

Áno
PWM, RF, 0-10V, DALI, DMX

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20
Voliteľné IP65/IP66

ROZMERY

Šírka 10 mm
Hrúbka 2,1 mm
Delenie 62,5 mm
Balenie 5 m

