


# LED PÁS CC ERALED - séria ULTRA EFEKTÍVNE



LED pás extra výkonný s nízkym príkonom.



## PHOTOMETRICS

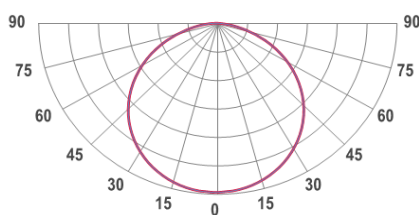

## ILUMINAČNÝ DIAGRAM

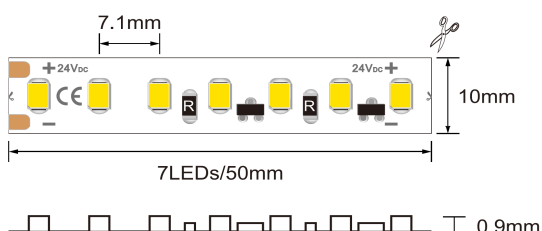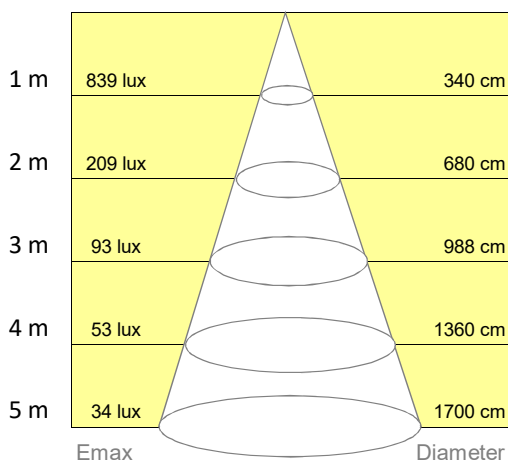

## Model

ERA2835-DL140-WW-UE  
ERA2835-DL140-NW-UE  
ERA2835-DL140-PW-UE

3000K

4000K

6500K

## ELEKTRO PARAMETER

24VDC - 14W/m  
3 SDCM 1 Bin 3oz

## FARBA CCT

3000K teplá biela CRI85  
4000K neutral biela CRI85  
6500K studená biela CRI85

## LED INFO

SMD2835 Epistar  
140LED/m

## SVETELNÝ TOK

3000K 2465lm  
4000K 2575lm  
6500K 2570lm

## TEPLOTA

Pracovná - 20° ~ + 45°C  
Max < 75°C

## STMIEVANIE

Áno  
PWM, RF, 0-10V, DALI, DMX

## VYŽAROVACÍ UHOL

120°

## KRYTIE

IP20  
Voliteľné IP65/IP67/IP68

## ROZMERY

Šírka 10 mm  
Hrúbka 0,9 mm  
Delenie 50 mm  
Balenie 5 m

