



LED PÁS CC ERALED - séria ULTRA EFEKTÍVNE



LED pás extra výkonný s nízkym príkonom.

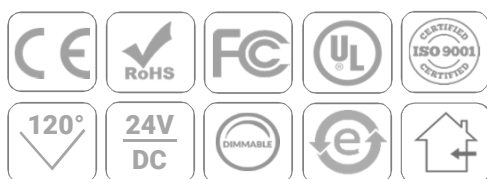

PHOTOMETRICS

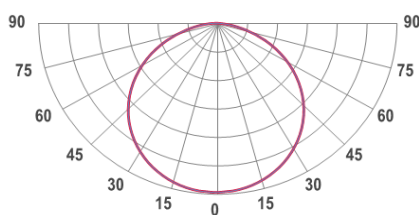

ILUMINAČNÝ DIAGRAM

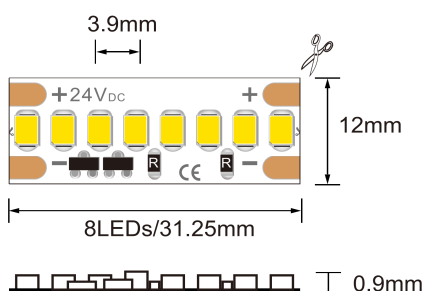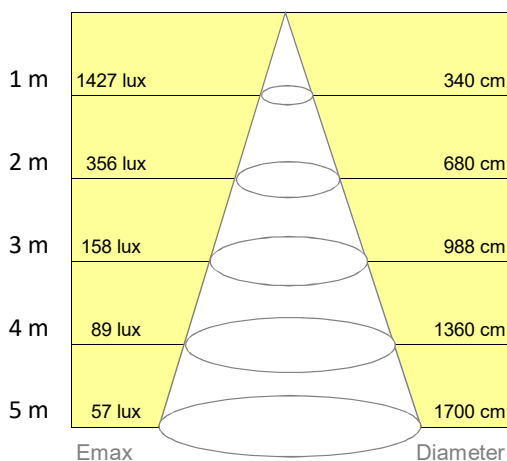

Model

ERA2835-DL256-WW-UE

3000K

ERA2835-DL256-NW-UE

4000K

ERA2835-DL256-PW-UE

6500K

ELEKTRO PARAMETER

24VDC - 24W/m

3 SDCM 1 Bin 3oz

FARBA CCT

3000K teplá biela CRI85

vol 90/95

4000K neutral biela CRI85

vol 90/95

6500K studená biela CRI85

vol 90/95

LED INFO

SMD2835 Epistar

256LED/m

SVETELNÝ TOK

3000K

4190lm

4000K

4380lm

6500K

4190lm

TEPLOTA

Pracovná - 20° ~ + 45°C

Max < 75°C

STMIEVANIE

Áno

PWM, RF, 0-10V, DALI, DMX

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

Voliteľné IP54/IP65/IP66/IP67/IP68

ROZMERY

Šírka

12 mm

Hrúbka

0,9 mm

Delenie

31,25 mm

Balenie

5 m

