


# LED PÁS CV ERALED - SÉRIA SIDE

LED pás CV SMD335 - bočné vyžarovanie



ILUMINAČNÝ DIAGRAM

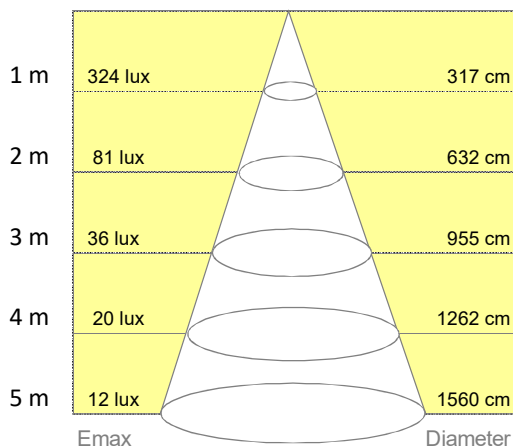

Model

ERA335-WN120-WW

ERA335-WN120-NW

ERA335-WN120-PW

3000K

4000K

6000K

ELEKTRO PARAMETER	24VDC - vol. 12VDC
	9,6W/m

FARBA CCT	3000K teplá biela CRI90
	4000K neutral biela CRI90
	6000K studená biela CRI90

LED INFO	SMD335 3 Step 1Bin
	120LED/m

SVETELNÝ TOK	3000K	828lm
	4000K	855lm
	6000K	882lm

TEPLOTA	Pracovná - 20° ~ + 50°C
	Max < 65°C

STMIEVANIE	PWM, RF
	DALI, DMX, 0-10V

VYŽAROVACÍ UHOL	120°
-----------------	------

KRYTIE	IP20
	IP54, IP65, IP67

ROZMERY	Šírka	8 mm
	Hrúbka	1,5 mm
	Delenie	50 mm
	Balenie	5 m

OSTATNÉ	CE, RoHS, UL, FCC, EN-E
	Záruka 3 roky

