


LED PÁS CV ERALED - SÉRIA SLIM

LED pás konštantného napätia SMD2835 - šírka 5mm



ILUMINAČNÝ DIAGRAM

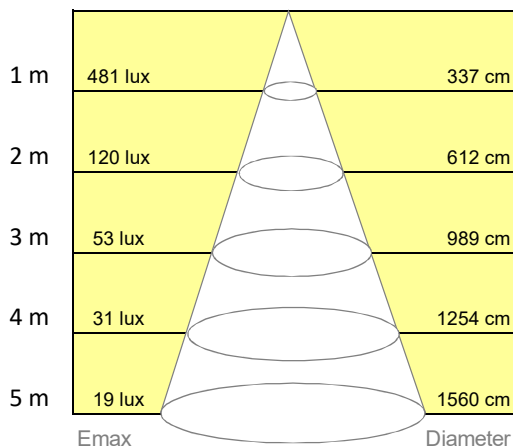

Model

ERA2835-WN120-WW-5

ERA2835-WN120-NW-5

ERA2835-WN120-PW-5

3000K

4000K

6000K

ELEKTRO PARAMETER	24VDC - vol. 5VDC, 12VDC
	13W/m

FARBA CCT	3000K teplá biela CRI90
	4000K neutral biela CRI90
	6000K studená biela CRI90

LED INFO	SMD2835 3 Step 1Bin
	120LED/m

SVETELNÝ TOK	3000K	1465lm
	4000K	1570lm
	6000K	1590lm

TEPLOTA	Pracovná - 20° ~ + 50°C
	Max < 65°C

STMIEVANIE	PWM, RF
	DALI, DMX, 0-10V

VYŽAROVACÍ UHOL	120°
-----------------	------

KRYTIE	IP20
	IP54, IP65

ROZMERY	Šírka	5 mm
	Hrúbka	1 mm
	Delenie	50 mm
	Balenie	5 m

OSTATNÉ	CE, RoHS, UL, FCC, EN-E
	Záruka 3 roky

