



LED PÁS CV ERALED - SÉRIA SLIM

LED pás konštantného napätia SMD2835 - šírka 5mm

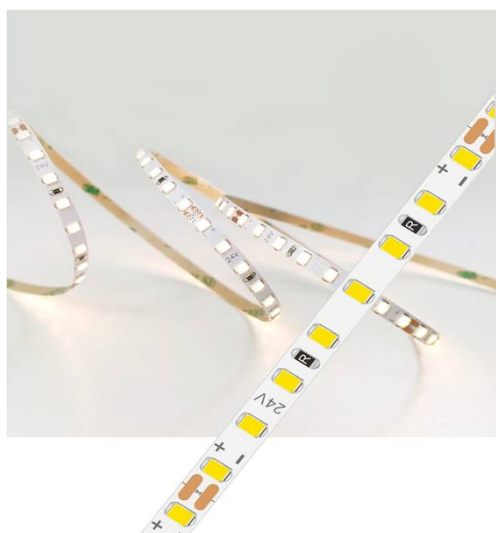

ILUMINAČNÝ DIAGRAM

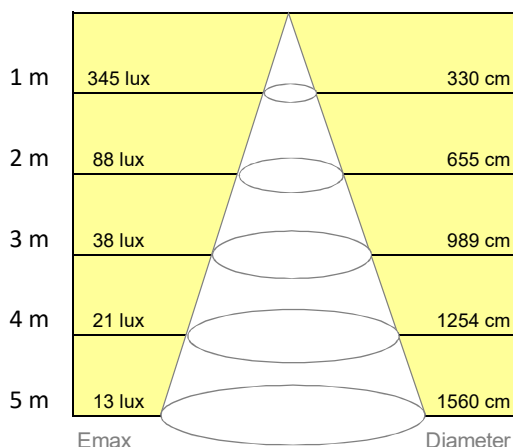

Model

ERA2835-WW128-24-YC

ERA2835-NW128-24-YC

ERA2835-PW128-24-YC

3000K

4000K

6500K

ELEKTRO PARAMETER	24VDC - vol. 12VDC
	5W/m

FARBA CCT	3000K teplá biela CRI90
	4000K neutral biela CRI90
	6500K studená biela CRI90

LED INFO	SMD2835 3 Step 1Bin
	128LED/m

SVETELNÝ TOK	3000K	800lm
	4000K	850lm
	6500K	825lm

TEPLOTA	Pracovná - 20° ~ + 45°C
	Max < 65°C

STMIEVANIE	PWM, RF
	DALI, DMX, 0-10V

VYŽAROVACÍ UHOL	120°
-----------------	------

KRYTIE	IP20
	IP54, IP65, IP67

ROZMERY	Šírka	5 mm
	Hrúbka	1,1 mm
	Delenie	62,5 mm
	Balenie	5 m

OSTATNÉ	CE, RoHS, UL, FCC, EN-D
	Záruka 3 roky

