

# LED PÁS CC ERALED - SÉRIA PROFI


LED pás konštantného prúdu SMD5050 - RGB

Model

ERA5050-RGB60-24-YCC



## PHOTOMETRICS

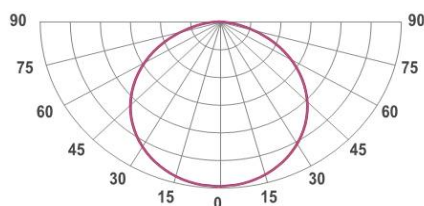

ELEKTRO PARAMETER	24VDC - 8W/m
	4oz double layer

FARBA CCT	RGB
	CRI90
	R:620-625, G:520-525, B:465-470nm

LED INFO	SMD5050 Epistar
	60LED/m

SVETELNÝ TOK	Red	65lm	2,7W
	Green	197lm	2,7W
	Blue	33lm	2,7W
	RGB	280lm	8,0W

TEPLOTA	Pracovná - 20° ~ + 45°C
	Max < 65°C

OVLÁDANIE	RGB, DMX512, DALI
STMIEVANIE	PWM, RF, 0-10V, DALI, DMX512

VYŽAROVACÍ UHOL	120°
-----------------	------

KRYTIE	IP20
	IP65, IP67

ROZMERY	Šírka	10 mm
	Hrúbka	2 mm
	Delenie	100 mm
	Balenie	10 m

OSTATNÉ	CE, RoHS, UL, FCC, EN-D
	Záruka 3 roky

