


LED PÁS CV ERALED - séria ULTRA EFEKTÍVNE

LED pás extra výkonný s nízkym príkonom - High Lumen - 16W, 160lm/W.



ILUMINAČNÝ DIAGRAM

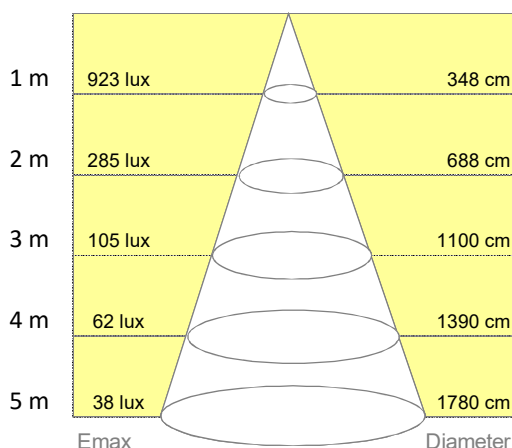

Všetky pripájacie body sú cínované!

Model

ERA2835-WW192-24-5Y

ERA2835-NW192-24-5Y

ERA2835-PW192-24-5Y

3000K

2700K

4000K

6500K

ELEKTRO PARAMETER

24VDC - 16W/m **160lm/W**

3 SDCM 1 Bin 3oz, teplotné čidlo

FARBA CCT

3000K teplá biela CRI90

4000K neutral biela CRI90

6500K studená biela CRI90

LED INFO

SMD2835 Epistar

192LED/m

SVETELNÝ TOK

3000K 2480lm

4000K 2560lm

6500K 2590lm

TEPLOTA

Pracovná - 20° ~ + 45°C

Max < 65°C

STMIEVANIE

Áno

RF, PWM, DALI, DMX, 0-10V

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

IP54, IP65, IP67

ROZMERY

Šírka 8 mm

Hrúbka 1,05 mm

Delenie 41,7 mm

Balenie 5 m

OSTATNÉ

CE, RoHS, UL, FCC, EN-B

Záruka 5 rokov

