


LED PÁS CV ERALED - SÉRIA ULTRA EFEKTÍVNE

LED pás extra výkonný s nízkym príkonom - **200 lm/W**



ILUMINAČNÝ DIAGRAM

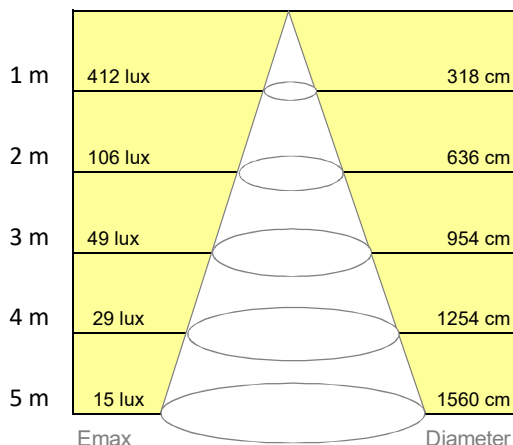

Model

ERA2835-WW126-24-YD

3000K

2700K

ERA2835-NW126-24-YD

4000K

ERA2835-PW126-24-YD

6500K

ELEKTRO PARAMETER	24VDC - 8W/m Double chip
	3 SDCM 1 Bin 20z

FARBA CCT	3000K teplá biela CRI90
	4000K neutral biela CRI90
	6500K studená biela CRI90

LED INFO	SMD2835 Epistar Double-Chip 126LED/m
----------	-----------------------------------------

SVETELNÝ TOK	3000K	1420lm/m
	4000K	1510lm/m
	6500K	1600lm/m

TEPLOTA	Pracovná - 20° ~ + 50°C Max < 65°C
---------	---------------------------------------

STMIEVANIE	PWM, RF DALI, DMX, 0-10V
------------	-----------------------------

VYŽAROVACÍ UHOL	120°
-----------------	------

KRYTIE	IP20 vol. IP54, IP65, IP67
--------	-------------------------------

ROZMERY	Šírka	8 mm
	Hrúbka	1,2 mm
	Delenie	71,4 mm
	Balenie	5 m

OSTATNÉ	CE, RoHS, EMC, FCC, PSE, EN-D Záruka 3 roky
---------	------------------------------------------------

