


# LED PÁS CV ERALED - SÉRIA ŠTANDARD


LED pás konštantného napätia SMD3014



## PHOTOMETRICS

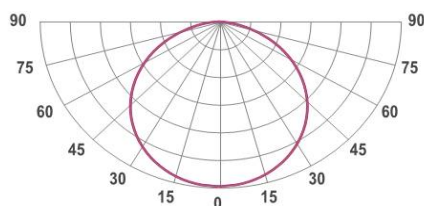

## ILUMINAČNÝ DIAGRAM

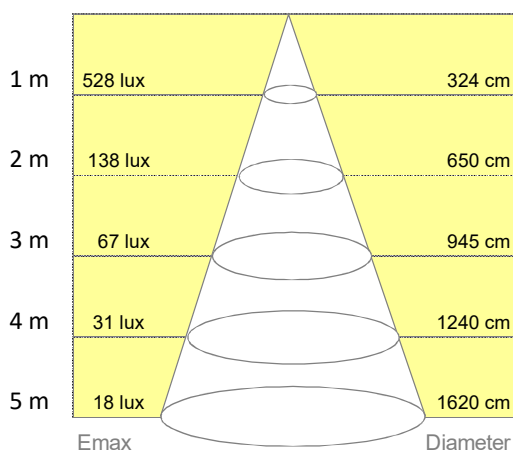

## Model

ERA3014-WN120-WW-24V

3000K

ERA3014-WN120-NW-24V

4000K

ERA3014-WN120-CW-24V

6000K

## ELEKTRO PARAMETER

24VDC

12W/m

## FARBA CCT

3000K teplá biela CRI>85

4000K neutral biela CRI>85

6000K studená biela CRI>85

## LED INFO

SMD3014 Epistar

120LED/m

## SVETELNÝ TOK

3000K 1584lm

4000K 1696lm

6000K 1762lm

## TEPLOTA

Pracovná - 20° ~ + 55°C

Max < 60°C

## STMIEVANIE

PWM, RF, 0-10V, DALI, DMX

## VYŽAROVACÍ UHOL

120°

## KRYTIE

IP20

Voliteľné IP65/IP67/IP68

## ROZMERY

Šírka 10 mm

Hrúbka 1,2 mm

Delenie 50 mm

Balenie 5 m

