

LED PÁS CV ERALED - SÉRIA ŠTANDARD

LED pás konštantného napätia SMD3014



Model

ERA3014-WN140-WW-24V

3000K

ERA3014-WN140-NW-24V

4000K

ERA3014-WN140-CW-24V

6000K



ELEKTRO PARAMETER

24VDC
14W/m

FARBA CCT

3000K teplá biela CRI85
4000K neutral biela CRI85
6000K studená biela CRI85

LED INFO

SMD3014 Epistar
140LED/m

SVETELNÝ TOK

3000K 1760lm
4000K 1885lm
6000K 1966lm


TEPLOTA

Pracovná - 20° ~ + 60°C
Max < 70°C


STMIEVANIE

PWM, RF, 0-10V, DALI, DMX

PHOTOMETRICS

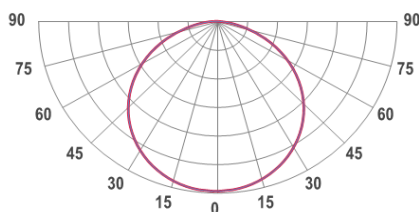

ILUMINAČNÝ DIAGRAM

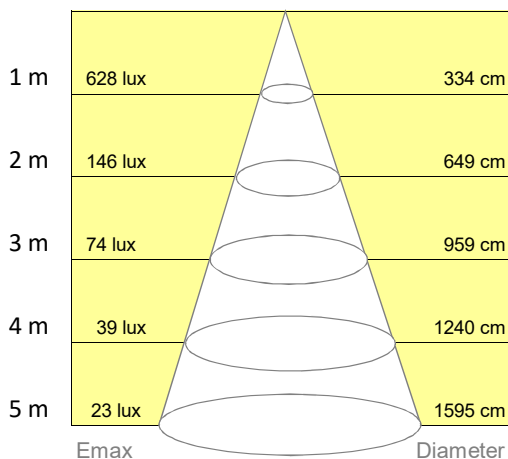

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20
Voliteľné IP65/IP67/IP68

ROZMERY

Šírka 10 mm
Hrúbka 1,2 mm
Delenie 50 mm
Balenie 5 m

