



# LED PÁS CC ERALED - séria PROFI

LED pás konštantného prúdu SMD2835

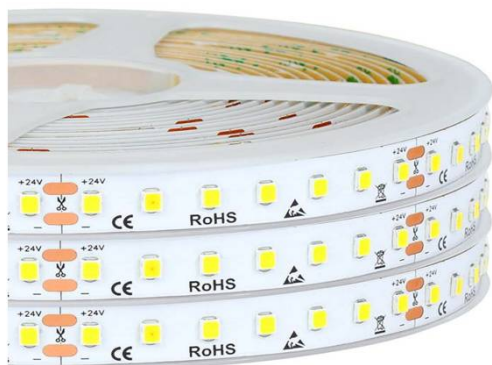

ILUMINAČNÝ DIAGRAM

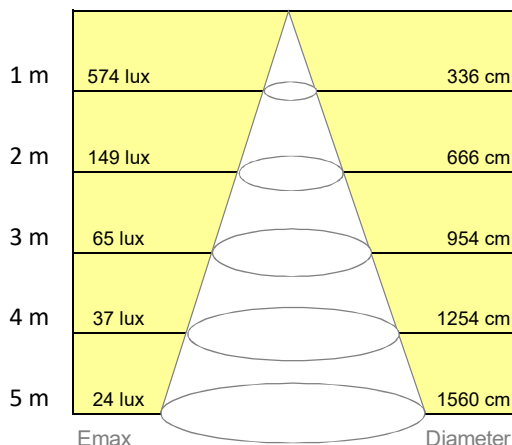

Model

ERA2835-WW126-24-CC

ERA2835-NW126-24-CC

ERA2835-PW126-24-CC

3000K

4000K

6500K

ELEKTRO PARAMETER	24VDC - 11W/m
	3 SDCM 1 Bin 30z, IC je súčasťou čipu

FARBA CCT	3000K teplá biela CRI90
	4000K neutral biela CRI90
	6500K studená biela CRI90

LED INFO	SMD2835 Epistar
	126LED/m

SVETELNÝ TOK	3000K	1430lm/m
	4000K	1484lm/m
	6500K	1540lm/m

TEPLOTA	Pracovná - 20° ~ + 50°C
	Max < 65°C

STMIEVANIE	PWM, RF
	DALI, DMX, 0-10V

VYŽAROVACÍ UHOL	120°
-----------------	------

KRYTIE	IP20
	IP54, IP65, IP67

ROZMERY	Šírka	10 mm
	Hrúbka	1,1 mm
	Delenie	55,5 mm
	Balenie	20 m

OSTATNÉ	CE, RoHS, UL, FCC, EN-E
	Záruka 3 roky

