


LED PÁS CV ERALED - séria **ULTRA EFEKTÍVNE**



LED pás extra výkonný s nízkym príkonom - High Lumen - 22W, 175lm/W.



PHOTOMETRICS

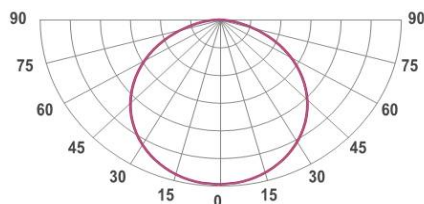

ILUMINAČNÝ DIAGRAM

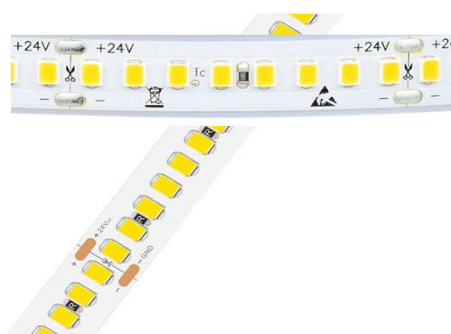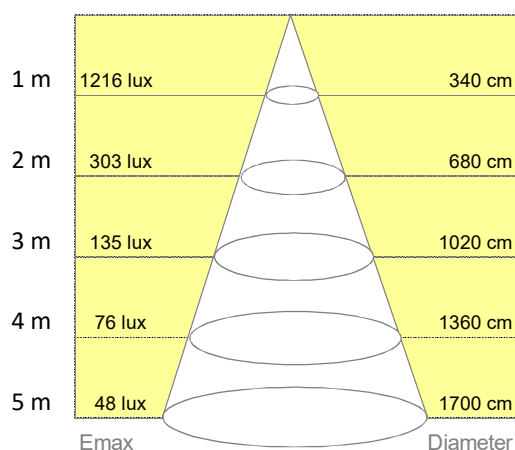

Model

ERA2835-WW240-24-5C

ERA2835-NW240-24-5C

ERA2835-PW240-24-5C

3000K

4000K

6500K

ELEKTRO PARAMETER

24VDC - 22W/m **175lm/W**

3 SDCM 1 Bin 3oz, teplotné čidlo

FARBA CCT

3000K teplá biela CR>80 vol>90

4000K neutral biela CR>80 vol>90

6500K studená biela CR>80 vol>90

LED INFO

SMD2835 Epistar

240LED/m

SVETELNÝ TOK

3000K 3570lm

4000K 3780lm

6500K 3700lm

TEPLOTA

Pracovná - 20° ~ + 45°C

Max < 65°C

STMIEVANIE

Áno

RF, PWM, DALI, DMX, 0-10V

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

IP54, IP65, IP67

ROZMERY

Šírka 10 mm

Hrúbka 1,1 mm

Delenie 33,3 mm

Balenie 5 m

OSTATNÉ

CE, RoHS, UL, FCC, EN-C

Záruka 5 rokov

Všetky pripájacie body sú cínované!

